

## CLW SERIES - (7' Wide)

**Small on size. Big on brawn.**

The CLW Series combines quality and economy into one ready-to-roll package. Although a little smaller than the CEW Series, the CLW Series has most of the same features and all the same craftsmanship. We'll put our 50+ years of customizing experience to work for you. Count on it!



### CLW SERIES - (7' Wide) Standards

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® "Rubber Ride" Suspension
- Tandem 4" Drop Axles (*single or tandem*)
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- Ball Coupler Hitch (*2" or 2 5/16"*)
- .030 Prefinished Aluminum Exterior Skin (11 colors)
- 5/16" Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4 " Plywood Interior Sidewall Lining
- 3/4 " Exterior Grade Plywood Floor
- Corrosion Preventative Compound (CPC) undercoated chassis
- 32" Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors
- LED Oval Tail Lights

### CLW SERIES - (7' Wide) Specifications

MODEL	MODEL CLW121	MODEL CLW141	MODEL CLW122	MODEL CLW142	MODEL CLW162
<b>BODY LENGTH</b>	12'0"	14'0"	12'0"	14'0"	16'0"
<b>BODY WIDTH</b>	7'0"	7'0"	7'0"	7'0"	7'0"
<b>OVERALL HEIGHT</b>	8'2"	8'2"	8'2"	8'2"	8'2"
<b>INTERIOR LENGTH</b>	11'9 1/4"	13'9 1/4"	11'9 1/4"	13'9 1/4"	15'9 1/4"
<b>INTERIOR WIDTH</b>	6'9 1/4"	6'9 1/4"	6'9 1/4"	6'9 1/4"	6'9 1/4"
<b>INTERIOR HEIGHT</b>	6'6"	6'6"	6'6"	6'6"	6'6"
<b>PLATFORM HEIGHT</b>	16 1/2"	16 1/2"	16 1/2"	16 1/2"	16 1/2"
<b>AXLES</b>	Single	Single	Tandem	Tandem	Tandem
<b>AXLE TYPE</b>	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
<b>SUSPENSION</b>	Torflex	Torflex	Torflex	Torflex	Torflex
<b>TIRE SIZE</b>	13"	13"	13"	13"	13"
<b>LOAD RANGE</b>	C	C	C	C	C
<b>WHEEL BOLT PATTERN</b>	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt
<b>HITCH BALL SIZE</b>	2"	2"	2 5/16"	2 5/16"	2 5/16"
<b>HITCH TO TOP OF BALL</b>	18"	18"	18"	18"	18"
<b>HITCH WEIGHT (% OF CURB WEIGHT)</b>	10-15%	10-15%	10-15%	10-15%	10-15%
<b>CURB WEIGHT(LB.)</b>	1350	1450	1440	1600	1720
<b>GVWR(LB.)</b>	2900	2900	5800	5800	5800
<b>ENTRY DOOR WIDTH</b>	32"	32"	32"	32"	32"
<b>WARRANTY</b>	6-Year	6-Year	6-Year	6-Year	6-Year

**Specifications subject to change.**

## CLW SERIES - (7' Wide) Options

- Fender Skirt
- Bally Cloth
- Removable 2-piece A-Frame
- Stabilizer Jacks (Scissor or Cornerpost Style)
- Vinyl Flooring
- Laminated Counters
- Cabinets with Positive Lock Latches
- Stainless Steel Sinks
- Screen Doors
- Radius Tinted Windows
- Wall Switches
- GFI Receptacles
- Fluorescent Lighting
- Service Panel
- 25 ft. Shoreline
- Cable Slot with Brush Seal
- Flip-Up Awnings
- Sign-Type Awnings with Plexiglass & Backlight
- Sliding Awning Rods with Gas Piston Assist
- Exterior Fold-Up Counter
- Serving Windows (*11 different styles*)

## CEW SERIES - (8' Wide)

### Small on size. Big on brawn.

The Wells Cargo CEW Series is our heavy-duty workhorse for the full-time concessionaire. Since we custom build on a production line basis, value is a standard feature. You get a top-notch trailer with the options you want at a great price. The service life of a CEW Series is outstanding, too – at least 15 years. We have the mail to prove it!



### CEW SERIES - (8' Wide) Standards

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® "Rubber Ride" Suspension
- Tandem 4" Drop Axles (*single or tandem*)
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- 2 5/16" Ball Coupler Hitch
- .030 Prefinished Aluminum Exterior Skin (*11 colors*)
- 5/16" Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4 " Plywood Interior Sidewall Lining
- 3/4 " Exterior Grade Plywood Floor
- Corrosion Preventative Compound (CPC) undercoated chassis
- 32" Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors
- LED Oval Tail Lights

## CEW SERIES - (8' Wide) Specifications

MODEL	MODEL CEW122	MODEL CEW162	MODEL CEW202	MODEL CEW242	MODEL CEW282	MODEL CEW322
<b>BODY LENGTH</b>	12'0"	16'0"	20'0"	24'0"	28'0"	32'0"
<b>BODY WIDTH</b>	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
<b>OVERALL HEIGHT</b>	8'5"	8'5"	8'5"	8'5"	8'5"	8'5"
<b>INTERIOR LENGTH</b>	11'9 1/4"	15'9 1/4"	19'9 1/4"	23'9 1/4"	27'9 1/4"	31'9 1/4"
<b>INTERIOR WIDTH</b>	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"
<b>INTERIOR HEIGHT</b>	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
<b>PLATFORM HEIGHT</b>	21"	21"	21"	21"	23"	23"
<b>AXLES</b>	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
<b>AXLE TYPE</b>	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
<b>SUSPENSION</b>	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex
<b>TIRE SIZE</b>	15"	15"	15"	15"	15"	15"
<b>LOAD RANGE</b>	D	D	D	D	D	D
<b>WHEEL BOLT PATTERN</b>	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt
<b>HITCH BALL SIZE</b>	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
<b>HITCH TO TOP OF BALL</b>	18"	18"	18"	18"	20"	20"
<b>HITCH WEIGHT (% OF CURB WEIGHT)</b>	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
<b>CURB WEIGHT(LB.)</b>	2350	2550	2740	3100	4043	4419
<b>GVWR(LB.)</b>	8000	8000	8000	8000	8000	8000
<b>ENTRY DOOR WIDTH</b>	32"	32"	32"	32"	32"	32"
<b>WARRANTY</b>	6-Year	6-Year	6-Year	6-Year	6-Year	6-Year

**Specifications subject to change.**

## CEW SERIES - (8' Wide) Options

- Fender Skirt
- Bally Cloth
- Removable 2-piece A-Frame
- Stabilizer Jacks (Scissor or Cornerpost Style)
- Vinyl Flooring
- Laminated Counters
- Cabinets with Positive Lock Latches
- Stainless Steel Sinks
- Screen Doors
- Radius Tinted Windows
- Wall Switches
- GFI Receptacles
- Fluorescent Lighting
- Service Panel
- 25 ft. Shoreline
- Cable Slot with Brush Seal
- Flip-Up Awnings
- Sign-Type Awnings with Plexiglass & Backlight
- Sliding Awning Rods with Gas Piston Assist
- Exterior Fold-Up Counter
- Serving Windows (*11 different styles*)

## Line-Ups

Are games, novelties, or souvenirs your business? With our impressive list of job-proven options and customizing ability, we can build the perfect trailer for the job. There's no limit to the different configurations available.



### Line-Ups Standards

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® "Rubber Ride" Suspension
- Tandem 4" Drop Axles (*single or tandem*)
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- 2 5/16" Ball Coupler Hitch
- .030 Prefinished Aluminum Exterior Skin (*11 colors*)
- 5/16" Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4 " Plywood Interior Sidewall Lining
- 3/4 " Exterior Grade Plywood Floor
- Corrosion Preventative Compound (CPC) undercoated chassis
- 32" Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors
- LED Oval Tail Lights

## Line-Ups Specifications

MODEL	8' x 12' LINE-UP	8' x 16' LINE-UP	8' x 20' LINE-UP	8' x 24' LINE-UP	8' x 28' LINE-UP	8' x 32' LINE-UP
BODY LENGTH	12'0"	16'0"	20'0"	24'0"	28'0"	32'0"
BODY WIDTH	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
OVERALL HEIGHT	8'5"	8'5"	8'5"	8'5"	8'5"	8'5"
INTERIOR LENGTH	11'9 1/4"	15'9 1/4"	19'9 1/4"	23'9 1/4"	27'9 1/4"	31'9 1/4"
INTERIOR WIDTH	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"	7'6 1/2"
INTERIOR HEIGHT	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
PLATFORM HEIGHT	21"	21"	21"	21"	23"	23"
AXLES	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
AXLE TYPE	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
SUSPENSION	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex
TIRE SIZE	15"	15"	15"	15"	15"	15"
LOAD RANGE	D	D	D	D	D	D
WHEEL BOLT PATTERN	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt
HITCH BALL SIZE	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
HITCH TO TOP OF BALL	18"	18"	18"	18"	20"	20"
HITCH WEIGHT (% OF CURB WEIGHT)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
CURB WEIGHT(LB.)	2350	2550	2740	3100	4043	4419
GVWR(LB.)	8000	8000	8000	8000	8000	8000
ENTRY DOOR WIDTH	32"	32"	32"	32"	32"	32"

**Specifications subject to change.**



## Line-Ups Options

- Fender Skirt
- Bally Cloth
- Removable 2-piece A-Frame
- Stabilizer Jacks (Scissor or Cornerpost Style)
- Recessed Floor
- Vinyl Flooring
- Laminated Counters
- Cabinets with Positive Lock Latches
- Stainless Steel Sinks
- Screen Doors
- Radius Tinted Windows
- Wall Switches
- GFI Receptacles
- Fluorescent Lighting
- Service Panel
- 25 ft. Shoreline
- Cable Slot with Brush Seal
- Flip-Up Awnings
- Sign-Type Awnings with Plexiglass & Backlight
- Sliding Awning Rods with Gas Piston Assist
- Exterior Fold-Up Counter
- Serving Windows (*11 different styles*)

## Quality Construction - Always One Step Ahead



### LED Stop/Tail/Turn

Designed exclusively for Wells Cargo. LED lights are proven to be brighter, more durable requiring less maintenance, and consume 90% less power reducing the load on the tow vehicle's electrical system as compared to traditional incandescent or bulb style lights.



### Wet Cell Battery

Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements.

Low voltage indicator light. Up to 100 recharges.



### Ramp Doors & Corner Post Jacks

Full width hinge with free floating 3/4" steel pin. Stronger than strap hinges. Won't bind. Welded perimeter door frame with gussets at major stress

points. Full length reinforcements prevent bowing. Spring assist cable(s) for safety. Rear corner post stabilizer jacks with steel tube post are coated in Zincdychromate for rust resistance. *(Ramp door standard on certain models only.)*



### 12 Volt Electrical System

All circuitry distributed from an easily accessible interior junction box. Primary

connections made with wire nuts. No hidden splices. All wiring is SAE truck/trailer color coded wire. One central location for all troubleshooting.



### Side Doors (Aluminum Hinges)

All door openings are welded with formed steel channel headers and gusseted for

rigid anchoring. Exclusive vacuum laminating process unitizes door components forming a super strong, lightweight door. The polystyrene core provides full insulation while the extruded aluminum trim adds extra rigidity. Resists bowing and warping.



### Anodized Roof Cove

Extruded aluminum Roof Cove (with drip rail) provides extra body support and

solid anchoring for roof and prefinished aluminum skin. Special anodizing process assures cove will maintain its "like-new" luster for years with minimal maintenance.



### All Aluminum Anti-Rack Cam Lock

Commercial quality cast aluminum Cam Lock and stainless steel hasp deliver a long lasting, no-rust finish for the life of

your trailer. Anti-Rack design (forked Cam with "T" shaped Keeper) forms a structural link



### Bottom Trim

Extruded aluminum Bottom Trim provides extra body support and solid anchoring for prefinished

aluminum skin. Special anodizing process

between door header and footer reducing door movement, frame torque, and road vibration. Better seal compression to prevent moisture penetration.



#### **Corrosion Preventive Measures**

To ward off the damaging effects of rust a Wells Cargo chassis is protected with a laboratory tested, automotive style undercoating.

All exposed steel is painted with a state-of-the-art process including both a primer & urethane topcoat for a smooth, long lasting finish. Also, a special corrosion resistant tape is applied between the steel frame and exterior aluminum skin to prevent electrolysis.

#### **Plus:**

- Fiberglass End Caps
- Exterior Grade Plywood Floor (undercoated)
- .030 Aluminum Exterior Skin
- Exclusive Non-Corrosive Screw Fasteners
- Recessed/Lighted License Plate Holder
- Aluminum Roof (4', 5', 6' & 7' wide models)
- Galvanized Steel Roof (8' wide models)
- Jack Ramp Hoist with Sand Pad
- 12 Volt Trailer End Connector

assures trim will maintain its "like-new" luster for years with minimal maintenance.



#### **Torflex® Rubber Ride Axles with E-Z Lube Hubs**

Equipped with Torflex® rubber torsion suspension system with progressive

torque action and independent wheel movement for maximum shock absorption and road stability. E-Z Lube hubs with outside grease fittings for bearing lubrication without disassembly. E-Coated wheels and brand name tires.



#### **Fenders**

Durable Aluminum Tread Plate fenders on single axle models.

Tandem axle models feature powder-coated, galvanealed steel fenderettes. Both styles provide attractive, long lasting rust resistant finishes. Easy to replace in the event of damage.

**More Exterior Options**



Flow-Thru Vents



High Security Cam Lock




Heavy Duty Stabilizer Jack



Side Doors



Light Duty Stabilizer Jack

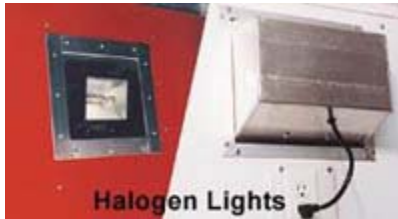

Halogen Lights



Awnings



Exterior Spare Tire Carrier



Radius Tinted Windows




**More External Options**







Stone Guard Ball Hitch

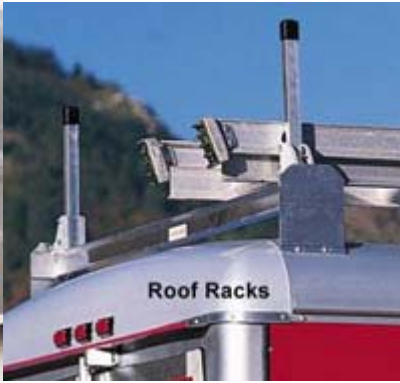

Roof Racks



Ramp Door Extension



High Profile Brake Lights



Stone Guard Gooseneck



Roof Vent



Access Doors



On-Board Generator



## Skin Colors



## Warranty

### Duration of Warranty

Your Wells Cargo equipment, which has been manufactured, tested and inspected in accordance with carefully specified engineering requirements is warranted to the original owner to be free from defects in material and workmanship for the period of six (6) years, except as herein limited, from date of purchase. The obligation of this Warranty shall be limited to repairing or replacing any part or parts which, in the opinion of the Company, shall be proved defective in materials or workmanship under normal use and service during the six (6) year period commencing with the date of purchase. Jack rams, electrical wiring, glass, sealants, doors, seals, locks, paint, plumbing, couplers and jacks are warranted for a period of one (1) year from date of purchase.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

## **Limitations and Exclusions**

This Warranty shall NOT extend to:

1. Wells Cargo equipment which has been modified, repaired, or altered in any way without the express written consent of Wells Cargo.
2. Unreasonable use (including failure to provide reasonable and necessary maintenance).
3. Tires, axles, axle assemblies, suspension components, ranges, heaters, refrigerators, air conditioners or all other appliances or components of the Wells Cargo equipment which are warranted separately by the respective manufacturers of said components. These warranties are contained in your owners packet.
4. Any consequential damages for breach of this or any other warranty expressed or implied whatsoever. Repair or replacement under this Warranty is the exclusive remedy of the customer. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.
5. Parts not supplied by Wells Cargo.
6. Certain parts which require replacement in the ordinary course of use to normal wear.

## **Procedure**

To secure repair of a Wells Cargo trailer or any warranted parts under this Warranty, the unit or warranted part must be delivered, charges prepaid, to the nearest Wells Cargo manufacturing facility or as directed by Wells Cargo.

Your Wells Cargo dealer from whom you purchased your unit is responsible for the registration of your warranty with the factory. We ask that you cooperate with your dealer in supplying the necessary information completing the warranty card so that we may better serve you. You may either download the warranty, fill it out and mail it to us or fill out the Online form from the provided links below.